



6 x 6,5'' + 2 x 15'' 3-Way Line-Array Front-System

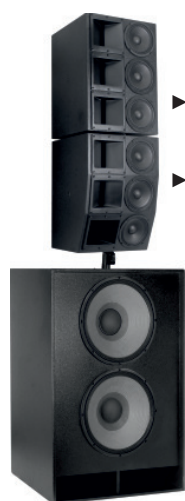

▶ **NCS L33F = Flat Version**
90° x 15° dispersion (HxV)

▶ **NCS L33C = Curved Version**
90° x 36° dispersion (HxV)

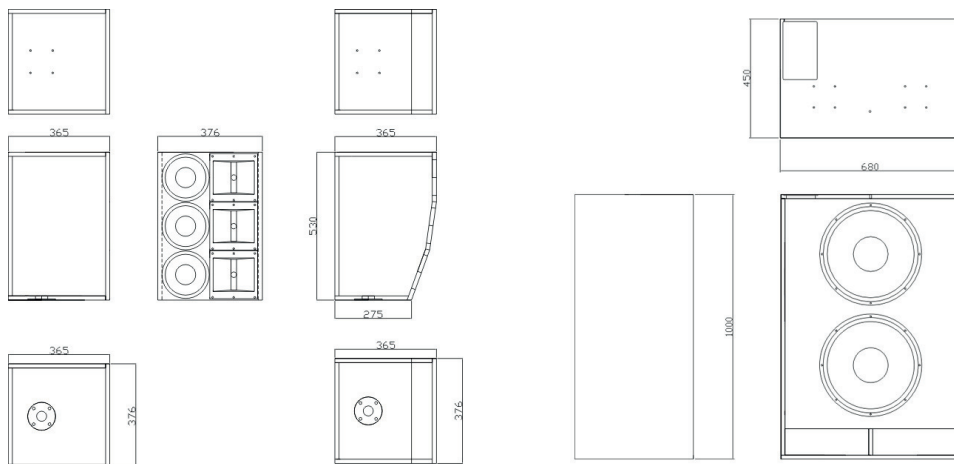

Features NCS L33F (flat version) Line Array

- ▶ 360 W / 720 W power handling
- ▶ 90° x 15° (flat) dispersion (HxV)
- ▶ Vertical array design
- ▶ Very high SPL

Features NCS L33C (curved version) Line Array

- ▶ 360 W / 720 W power handling
- ▶ 90° x 36° (curved) dispersion (HxV)
- ▶ Vertical array design
- ▶ Very high SPL

NCS 215B Subwoofer


- ▶ 1.200 W / 2.400 W power handling
- ▶ 2 x 15''' high power loudspeaker
- ▶ 4'' voice coil
- ▶ Very low power compression
- ▶ Integrated voice coil cooling system
- ▶ TML cabinet design
- ▶ Deep and clear bass reproduction

NCS L33F / NCS L33C Line Array

The NCS L33 F/C is a two-way high performance screen channel loudspeaker system. The cabinet is equipped with three 1" HF drivers (1.75" voice coil), which are mounted onto an vertical array horn design. The NCL L33 F/C is available in two versions with different vertical angles. The nominal coverage of the F (flat) version is 90° x 15° (H x V). The C (curved) version has a coverage of 90° x 36° (H x V). The MF/LF frequency range is covered by three 120 Watts 6,5" speaker which are mounted in a non vented cabinet to ensure very clear and low / mid reproduction. The system can be driven in active or passive mode. Therefore a passive crossover is available. The cabinet is constructed by 15mm wood, covered with Black NOVA PolyCoat© finish and equipped with several M6 and M8 screws and a 35mm speaker stand adapter which ensures the safe and stable connection to the optional accessories. Four open end sockets are mounted on the back of the cabinet for signal input and link output. The power rating of the NCS L33F / NCS L33C line array cabinet is 360 W at 3.2 Ohms (per unit).

NCS 215B Subwoofer

The NCS 215 B is a high performance screen channel bass system. The Sub frequency range is covered by two 600 Watts 15" speakers which are mounted in a perfect tuned TML design to ensure clear and deep bass reproduction. The system can be driven in active mode. The recommended crossover frequency is between 80 and 120 Hz. The cabinet is constructed by 15mm wood, covered with Black NOVA PolyCoat© finish and equipped with several M6 and M8 screws which ensures the safe and stable connection to the optional accessories. Four open end sockets are mounted on the top of the cabinet for signal input and signal link output. The power rating of the NCS 215 B is 1.200W at 4 Ohms.

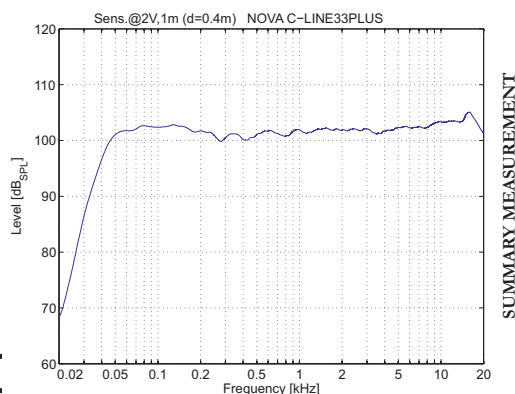

All measurements have been generated with FOUR AUDIO - WINMF / ROBO3 frontend. All measurements under free field conditions.



CLINE33 PLUS




6 x 6,5" + 2 x 15" 3-Way Line-Array Front-System


NCS L33F (flat version) and L33C (curved version) Line Array

Article number:	# 00617 (C-LINE 33 PLUS system) including subwoofer
System Type:	3 x 6" configuration (per cabinet)
Frequency Range:	80 Hz - 20 kHz
Coverage Pattern:	FLAT: 90° x 36° / CURVED: 90° x 36° nominal (HxV)
Crossover Modes:	Passive
Crossover Frequency:	1.25 kHz
Power Rating (Continuous / Program / Peak):	Passive: 2 x 360 W / 2 x 720 W / 2 x 1.440 W Active LF: n/a Active HF: n/a
System Sensitivity (1w/1m):	103 dB SPL (per cabinet)
LF Driver:	3 x NOVA 6/100C (per cabinet)
LF Nominal Impedance:	3.2 ohms (per cabinet)
HF Driver:	3 x NOVA C1000, 1.75 in. voice coil comp. driver (p. cabinet)
HF Nominal Impedance:	3.2 ohms (per cabinet)
Active Tunings:	n/a
Enclosure:	NOVA ProWo© MDF, 16 mm
Suspension / Mounting:	n/a
Finish:	Black NOVA PolyCoat© finish
Grille:	n/a
Dimensions (W x H x D):	376 mm x 530 mm x 365 mm (per cabinet)
Net Weight:	25 kg (each)
Optional Accessories:	# 00507: NCS-S Stacking Adapter

IEC filtered noise with 6 dB crest factor. / Calculated based on power rating and sensitivity.
CRAAFT AUDIO GmbH continually engages in research related to product improvement. Materials, design and sound tuning are introduced on existing products. Any current product of CRAAFT AUDIO GmbH may differ in some respect from its published description. CRAAFT AUDIO GmbH will always equal or exceed to original design unless otherwise noted. Limited liability on contents. Subjects to change without prior notice.

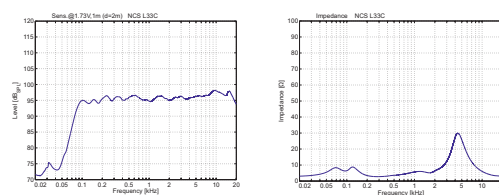

CURVED VERSION


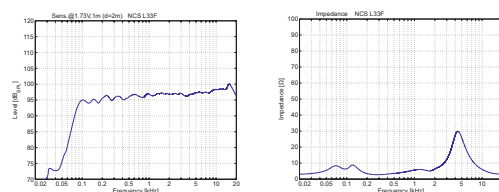


FLAT VERSION

NCS 215B Subwoofer

Article number:	# 00617 (C-LINE 33 PLUS system) incl. line array cabinet(s)
System Type:	2 x 15" configuration
Frequency Range:	44 Hz - 1.2 kHz
Coverage Pattern:	n/a
Crossover Modes:	Passive
Crossover Frequency:	70 - 120 Hz (recommended)
Power Rating (Continuous / Program / Peak):	Passive: 600 W / 1.200 W / 2.400 W Active LF: n/a Active HF: n/a
System Sensitivity (1w/1m):	100 dB SPL
LF Driver:	1 x NOVA 15/600C
LF Nominal Impedance:	8 ohms
HF Driver:	n/a
HF Nominal Impedance:	n/a
Active Tunings:	70 - 120 Hz (recommended)
Enclosure:	NOVA ProWo© MDF, 16 mm
Suspension / Mounting:	n/a
Finish:	Black NOVA PolyCoat© finish
Grille:	n/a
Dimensions (W x H x D):	680 mm x 500 mm x 450 mm
Net Weight:	30 kg (each)
Optional Accessories:	# 00507: NCS-S Stacking Adapter

IEC filtered noise with 6 dB crest factor. / Calculated based on power rating and sensitivity.
CRAAFT AUDIO GmbH continually engages in research related to product improvement. Materials, design and sound tuning are introduced on existing products. Any current product of CRAAFT AUDIO GmbH may differ in some respect from its published description. CRAAFT AUDIO GmbH will always equal or exceed to original design unless otherwise noted. Limited liability on contents. Subjects to change without prior notice.

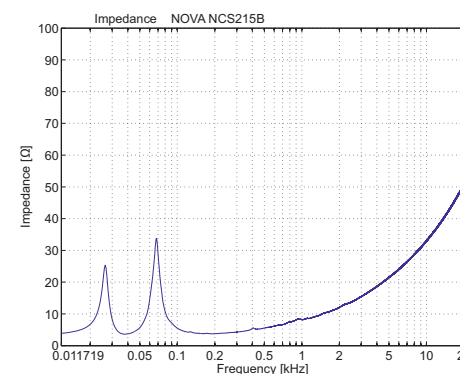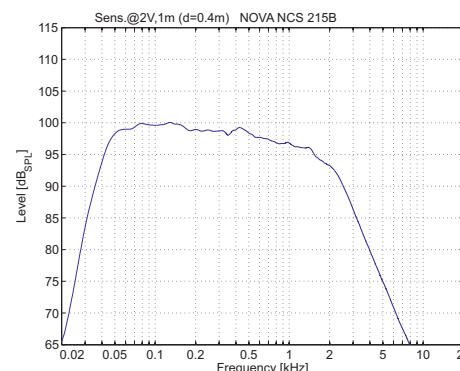

All measurements have been generated with FOUR AUDIO - WINMF / ROBO3 frontend.
All measurements under free field conditions.

